

MLS PostgreSQL

Joe Conway
joe.conway@crunchydata.com
mail@joeconway.com

Crunchy Data

April 20, 2016




Agenda


- Introduction
 - 50,000 ft Perspective
- Solution Components
 - RLS
 - SELinux
 - sepgsql
- Configuration and Setup
 - Operating System
 - sepgsql
 - Database schema/DDL
- Results




What is MLS?

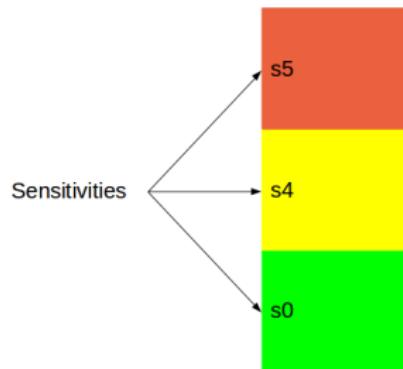


What is MLS?

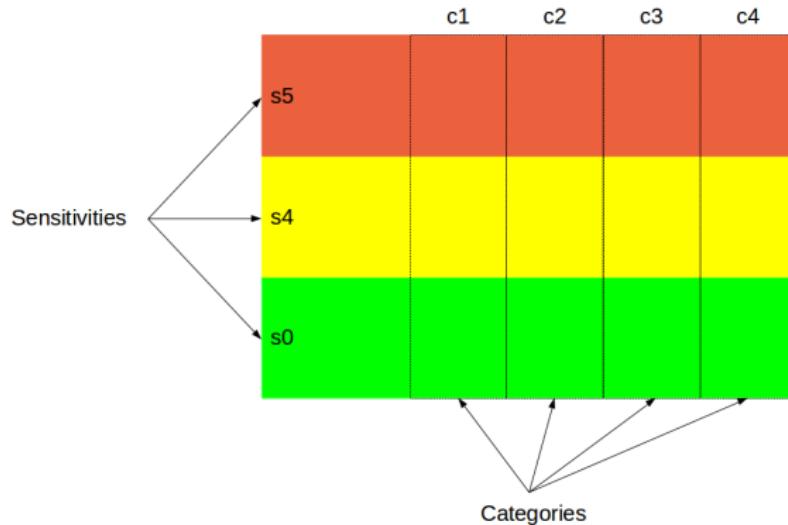


Example Use-case

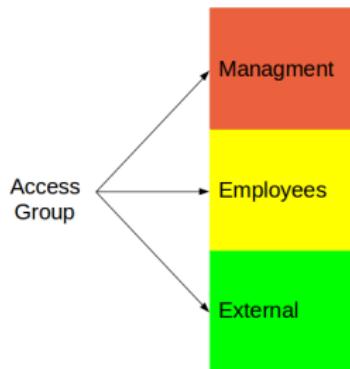


Example Use-case

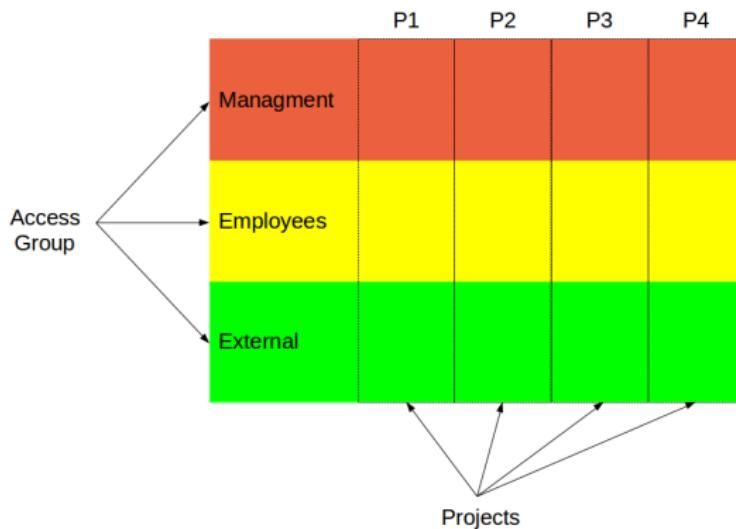


Example Use-case

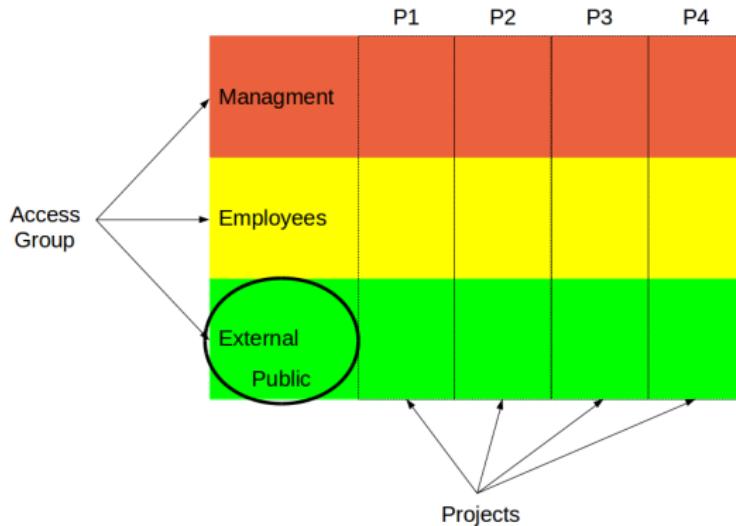


Example Use-case

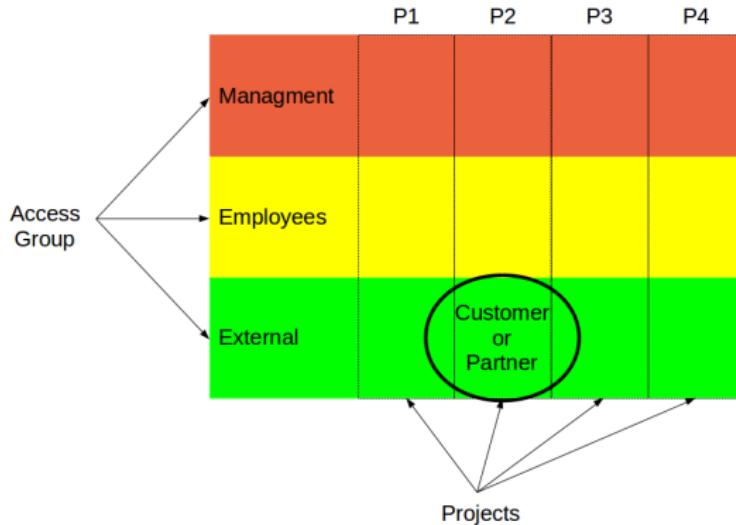

Example Use-case

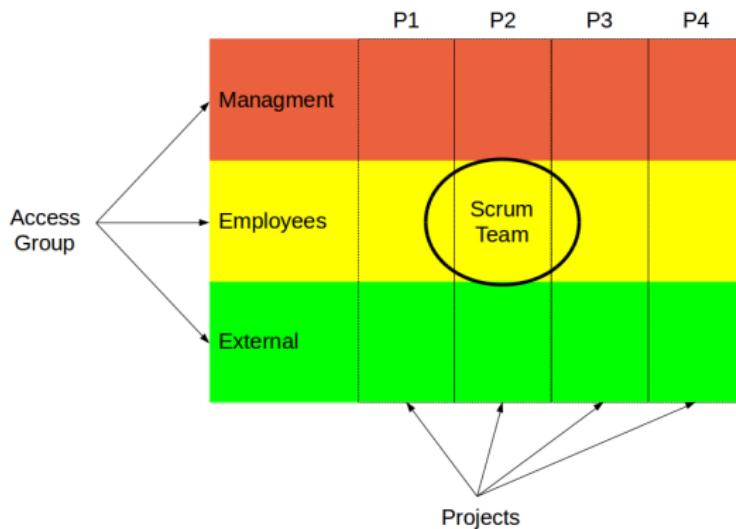

Example Use-case

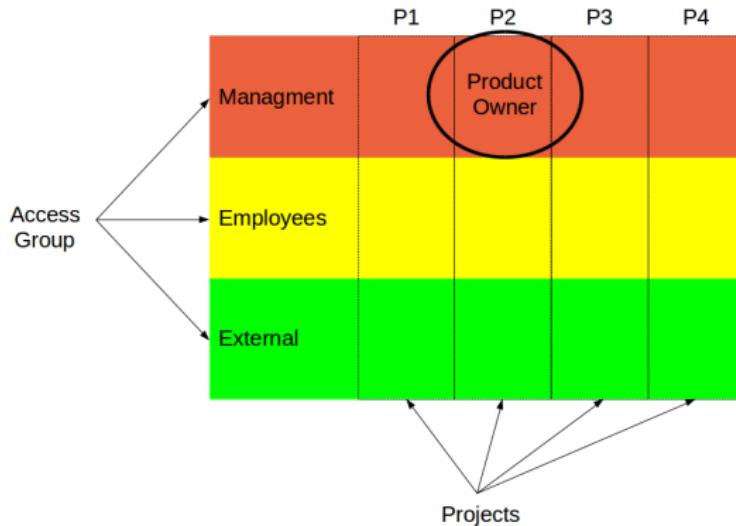

Example Use-case

Client
Operating Sys
SELinux User
s0-s6:c0-c1023



PostgreSQL
Mapped
SELinux User
s0-s6:c0-c1023



Example Use-case


Client
Operating Sys
SELinux User
s0:s6:c0-c1023

Employees

PostgreSQL
Mapped
SELinux User
s0-s6:c0-c1023



Example Use-case

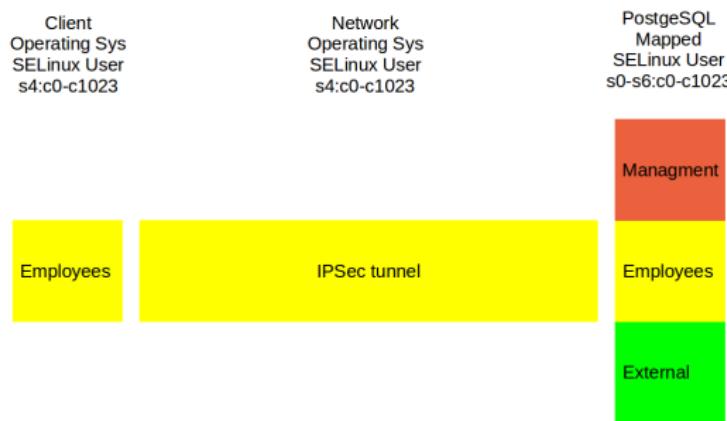


Example Use-case

Client
Operating Sys
SELinux User
s4:c0-c1023

Network
Operating Sys
SELinux User
s4:c0-c1023

PostgreSQL
Mapped
SELinux User
s4:c0-c1023



Business Case

- Why not just create separate database for each level?
 - Redundant hardware
 - Inhibits reporting and analysis
 - Data duplication
- What about filtering and enforcement by application?
 - Database provides integrity
 - RLS is transparent and performs well



Row Level Security

- New feature in PostgreSQL 9.5
- Enabled on per-table basis
- Enforced with POLICY
 - USING expression (old row)
 - WITH CHECK expression (new row)



Row Level Security - Typical Example

```
CREATE USER bob;  
CREATE USER alice;  
  
CREATE TABLE t1 (id int primary key, f1 text, app_user text);  
INSERT INTO t1 VALUES(1,'a','bob');  
INSERT INTO t1 VALUES(2,'b','alice');  
ALTER TABLE t1 ENABLE ROW LEVEL SECURITY;  
CREATE POLICY P ON t1 USING (app_user = current_user);  
GRANT SELECT ON t1 TO public;
```



Row Level Security - Typical Example

```
SELECT * FROM t1;  
id | f1 | app_user  
----+-----  
1 | a | bob  
2 | b | alice
```

```
SET SESSION AUTHORIZATION bob;  
SELECT * FROM t1;  
id | f1 | app_user  
----+-----  
1 | a | bob
```

```
SET SESSION AUTHORIZATION alice;  
SELECT * FROM t1;  
id | f1 | app_user  
----+-----  
2 | b | alice
```



Security Enhanced Linux

- SELinux: Mandatory Access Control (MAC)
- Versus: Discretionary Access Control (DAC)
- Enforced in kernel space
- Managed via Reference Policy
 - Targeted Policy
 - MLS Policy
- Customized via Policy Modules

https://people.redhat.com/duffy/selinux/selinux-coloring-book_A4-Stapled.pdf



MLS Reference Policy

- Based on Bell-LaPadula model
 - Read-down
 - Write-up
- Modified for Write-equals



Security Context

- <user>:<role>:<domain>:<sensitivity>:<category>
 - <user> = SELinux user
 - <role> = SELinux role
 - <domain> = type
 - <sensitivity> = low to high, e.g. s0, s1, ... s15
 - <category> = compartmentalization label
- <level> = <sensitivity>:<category>
- Examples

```
dbs6_u:dbclient_r:dbclient_t:s0
system_u:object_r:sepgsql_table_t:s0-s15:c0.c1023
```



Security Level

- s0-s15
 - Represents a range of sensitivities
 - Can be defined with aliases
 - Hierarchical dominance is defined
- c0.c1023
 - Represents a group of categories
 - Can be defined with aliases
 - No hierarchical dominance



Security Access Decision

- Subject Context (PostgreSQL user)
- Object/Target Context (table, row, etc.)
- Permission (e.g. select, update, etc.)
- Type Enforcement
 - Subject type needs requested permission on object type, e.g.:
`allow postgresql_t sepysql_table_type : db_table
{ create drop ... select update insert delete lock };`
- Sensitivity
 - Subject must dominate Object
 - e.g. s5 dominates s3
- Category
 - Subject must include Object category
 - e.g. s5:c1.c5 does not include s3:c42



sepgsql Extension

- PostgreSQL supports SECURITY LABEL command
- Label Provider uses the label
- Security label used for SELinux Object context
- Customized with additional functionality
 - Mapping of database user to SELinux user
 - Subject context transition based on postgres user and network peer context
 - `sepgsql_check_row_label()`
 - `sepgsql_create_row_label()`



SECURITY LABEL support

- Standard PostgreSQL
 - SCHEMA
 - TABLE, VIEW, COLUMN
 - SEQUENCE
 - FUNCTION
- Custom
 - ROW



sepgsql_check_row_label(arg1 [, arg2])

- Object context: arg1 - row security_label
- Subject context: client - SELinux user+network
- Permission Type: default select, otherwise arg2:
 - select, insert, update, delete
 - relabelfrom, relabelto
- Access decision: SELinux



sepgsql_check_row_label(arg1 [, arg2])

```
select sepgsql_getcon();
        sepgsql_getcon
-----
dbs5_u:dbclient_r:dbclient_t:s5:c1

SELECT
    sepgsql_check_row_label
    ('system_u:object_r:sepgsql_table_t:s0') as s0sel,
    sepgsql_check_row_label
    ('system_u:object_r:sepgsql_table_t:s6') as s6sel;
s0sel | s6sel
-----+
t      | f
```



sepgsql_check_row_label(arg1 [, arg2])

```
select sepgsql_getcon();
      sepgsql_getcon
-----
dbs5_u:dbclient_r:dbclient_t:s5:c1

SELECT
  sepgsql_check_row_label
  ('system_u:object_r:sepgsql_table_t:s0','delete') as s0del,
  sepgsql_check_row_label
  ('system_u:object_r:sepgsql_table_t:s5','delete') as s5del,
  sepgsql_check_row_label
  ('system_u:object_r:sepgsql_table_t:s5:c1','delete') as s5c1del;
s0del | s5del | s5c1del
-----+-----+-----
f      | f      | t
```



sepgsql_create_row_label(table_oid)

- Object context: Table security label
- Subject context: client - SELinux user+network
- Derives security_label context, typically used for a row

```
CREATE OR REPLACE FUNCTION get_table_label(tableoid oid)
RETURNS text AS $$  
SELECT label FROM pg_seclabels WHERE objoid = tableoid
AND objtype = 'table'  
$$ LANGUAGE sql;
```

```
\x
SELECT get_table_label('t1'::regclass) AS tcontext,
sepgsql_getcon() AS scontext,
sepgsql_create_row_label('t1'::regclass) AS security_label;
-[ RECORD 1 ]-----  
tcontext      | system_u:object_r:sepgsql_table_t:s0-s15:c0.c1023
scontext      | dbs5_u:dbclient_r:dbclient_t:s5:c1
security_label | dbs5_u:object_r:sepgsql_table_t:s5:c1
```



Operating System

- Red Hat or CentOS 7.2
- Install additional packages

```
# install EPEL
yum install epel-release; yum update

# install PGDG 9.5 rpms
yum install http://yum.postgresql.org/9.5/redhat/\
rhel-7-x86_64/pgdg-redhat95-9.5-2.noarch.rpm
yum install postgresql95\*

# install selinux rpms
yum install netlabel_tools selinux-policy-mls \
libsemanage-python policycoreutils-python \
setools-setools-console xinetd selinux-policy-devel
```



Networking

- Interfaces
 - Admin subnet and subnet per security level
 - Or use Labeled IPSec
- Routes
- netlabel
- sshd
- firewalld



SELinux - Configuration

- Install custom policy modules
- Create SELinux users
- Map database users to SELinux users



SELinux Roles and Mapping

SELinux Role	Role Type	PG Roles	Permissions
dbadm_r	OS	Cluster Owner	Admin DB at OS level
dbsec_r	OS, PgSQL	Sec Admin	Edit security-related files, relabel DB objects
dbsu_r	PgSQL	Superuser	Manage objects within DB
dbstaff_r	PgSQL	Staff User	Perform admin tasks
dbclient_r	PgSQL	Client	CRUD operations
dbguest_r	PgSQL	Client	Read-only operations



PostgreSQL - Custom Module

- Build and Configure custom sepysql
- Adjust some normal PostgreSQL configuration too

```
cd /opt/src/mls/crunchy-selinux-pgsql
USE_PGXS=1 make
USE_PGXS=1 make install

cat >> /var/lib/pgsql/9.5/data/postgresql.conf << \EOF
listen_addresses = '*'
row_security = on
shared_preload_libraries = 'crunchy-selinux-pgsql'

sepysql.enable_user_transition = on
sepysql.default_selinux_user = 'dbguest_u'
sepysql.force_rls = on
EOF
```



Create Demo Users

```
-- Create demo users

-- mapped to dbs0_u:dbclient_r:dbclient_t:s0
CREATE USER user1 WITH ENCRYPTED PASSWORD 'user1';

-- mapped to dbs4_u:dbclient_r:dbclient_t:s0-s4:c0.c9
CREATE USER user2 WITH ENCRYPTED PASSWORD 'user2';

-- mapped to dbs5_u:dbclient_r:dbclient_t:s0-s5:c0.c200
CREATE USER user3 WITH ENCRYPTED PASSWORD 'user3';

-- mapped to dbs6_u:dbclient_r:dbclient_t:s0-s6:c0.c1023
CREATE USER user4 WITH ENCRYPTED PASSWORD 'user4';
```



Table Definition

```
CREATE TABLE t1 (
    a int,
    b text,
    security_label text DEFAULT
        sepgsql_create_row_label('t1'::regclass::oid)
);

-- Grant permissions to table
GRANT ALL ON TABLE t1 TO user1, user2, user3, user4;

-- Enable Row Level Security on table.
ALTER TABLE t1 ENABLE ROW LEVEL SECURITY;
```



Table Definition

```
-- Create Row Level MLS policies.  
CREATE POLICY mls_select ON t1 FOR SELECT  
    USING (sepysql_check_row_label(security_label));  
  
CREATE POLICY mls_insert ON t1 FOR INSERT WITH CHECK  
    (sepysql_create_row_label('t1'::regclass::oid) = security_label);  
  
CREATE POLICY mls_update ON t1 FOR UPDATE  
    USING (sepysql_check_row_label(security_label))  
    WITH CHECK (sepysql_check_row_label(security_label, 'update'));  
  
CREATE POLICY mls_delete ON t1 FOR DELETE  
    USING (sepysql_check_row_label(security_label, 'delete'));
```



Sample Data

```
-- Seed table with sample data as superuser
INSERT INTO t1 VALUES
(1, 'a', 'system_u:object_r:sepysql_table_t:s0'),
(2, 'b', 'system_u:object_r:sepysql_table_t:s4:c1'),
(3, 'c', 'system_u:object_r:sepysql_table_t:s5:c1'),
(4, 'd', 'system_u:object_r:sepysql_table_t:s6:c1');
```



User Level Versus Subnet Level

```
# s0 user, s4 subnet
psql -h 192.168.6.20 -p 5432 -U user1 mls
Password for user user1:
psql: FATAL:  SELinux: unable to get default context for user: user1

# s0 user, s0 subnet
psql -qAt -h 192.168.5.20 -p 5432 -U user1 mls \
-c "select sepgsql_getcon()"
Password for user user1:
dbs0_u:dbclient_r:dbclient_t:s0

# s6 user, s0 subnet
psql -qAt -h 192.168.5.20 -p 5432 -U user4 mls \
-c "select sepgsql_getcon()"
Password for user user4:
dbs6_u:dbclient_r:dbclient_t:s0
```



SELECT on s0 Subnet

```
# s0 user, s0 subnet
psql -h 192.168.5.20 -p 5432 -U user1 mls \
-c "select * from t1"
Password for user user1:
 a | b | security_label
---+---+
 1 | a | system_u:object_r:sepgsql_table_t:s0
(1 row)

# s6 user, s0 subnet
psql -h 192.168.5.20 -p 5432 -U user4 mls \
-c "select * from t1"
Password for user user4:
 a | b | security_label
---+---+
 1 | a | system_u:object_r:sepgsql_table_t:s0
(1 row)
```



user4 SELECT on s6 Subnet

```
# s6 user, s6 subnet
psql -h 192.168.8.20 -p 5432 -U user4 mls \
-c "select * from t1"
Password for user user4:
 a | b | security_label
---+-----+
 1 | a | system_u:object_r:sepgsql_table_t:s0
 2 | b | system_u:object_r:sepgsql_table_t:s4:c1
 3 | c | system_u:object_r:sepgsql_table_t:s5:c1
 4 | d | system_u:object_r:sepgsql_table_t:s6:c1
(4 rows)
```



INSERT on s0 Subnet

```
# s0 user, s0 subnet
psql -h 192.168.5.20 -p 5432 -U user1 mls \
-c "insert into t1(a,b) values (11,'a1') returning *"
Password for user user1:
 a | b | security_label
---+---+-----
 11 | a1 | dbs0_u:object_r:sepgsql_table_t:s0
(1 row)

# s6 user, s0 subnet
psql -h 192.168.5.20 -p 5432 -U user4 mls \
-c "insert into t1(a,b) values (41,'a1') returning *"
Password for user user4:
 a | b | security_label
---+---+-----
 41 | a1 | dbs6_u:object_r:sepgsql_table_t:s0
(1 row)
```



INSERT on s6 Subnet

```
# s6 user, s6 subnet
psql -h 192.168.8.20 -p 5432 -U user4 mls \
-c "insert into t1(a,b) values (441,'d1') returning *"
Password for user user4:
 a | b | security_label
-----+-----+
 441 | d1 | dbs6_u:object_r:sepgsql_table_t:s6:c1
(1 row)
```



UPDATE on s0 Subnet

```
# s0 user, s0 subnet, s0 row
psql -h 192.168.5.20 -p 5432 -U user1 mls \
-c "update t1 set b = 'a1a' where a = 11 returning *"
Password for user user1:
 a | b | security_label
---+---+
 11 | a1a | dbs0_u:object_r:sepgsql_table_t:s0
(1 row)

# s6 user, s0 subnet, s0 row
psql -h 192.168.5.20 -p 5432 -U user4 mls \
-c "update t1 set b = 'd1d' where a = 41 returning *"
Password for user user4:
 a | b | security_label
---+---+
 41 | d1d | dbs6_u:object_r:sepgsql_table_t:s0
(1 row)
```



UPDATE on s6 Subnet

```
# s6 user, s6 subnet, s6 row
psql -h 192.168.8.20 -p 5432 -U user4 mls \
-c "update t1 set b = 'd1d' where a = 441 returning *"
Password for user user4:
 a | b | security_label
---+---+-----
 441 | d1d | dbs6_u:object_r:sepgsql_table_t:s6:c1
(1 row)

# however...s6 user, s6 subnet, s0 row
psql -h 192.168.8.20 -p 5432 -U user4 mls \
-c "update t1 set b = 'd1d1' where a = 41 returning *"
Password for user user4:
ERROR: new row violates row-level security policy for table "t1"
```



Performance Testing

- Compare t1 (RLS/MLS), r1 (Simple RLS), u1 (no RLS)
- 10 million rows per table
- 4 levels, 25% each
- INSERT test
- SELECT one row
- SELECT 50,000 rows



Performance - INSERT

```
WITH s(c) AS -- RLS/MLS case
(SELECT sepgsql_create_row_label('t1'::regclass::oid))
INSERT INTO t1 SELECT g.i, g.i::text, s.c
FROM generate_series(1, 10000000, 4) as g(i), s;
--Total Time: 67,399.591 ms
```

```
WITH s(c) AS -- RLS case
(SELECT sepgsql_create_row_label('r1'::regclass::oid))
INSERT INTO r1 SELECT g.i, g.i::text, s.c
FROM generate_series(1, 10000000, 4) as g(i), s;
--Total Time: 71,392.439 ms
```

```
WITH s(c) AS -- no RLS case
(SELECT sepgsql_create_row_label('u1'::regclass::oid))
INSERT INTO u1 SELECT g.i, g.i::text, s.c
FROM generate_series(1, 10000000, 4) as g(i), s;
--Total Time: 64,545.158
```



Performance - SELECT

```
-- SELECT 1 row
SELECT * FROM t1 WHERE a = 40;
-- Avg Time (10 runs): 1.508 ms
SELECT * FROM r1 WHERE a = 40;
-- Avg Time (10 runs): 1.460 ms
SELECT * FROM u1 WHERE a = 40;
-- Avg Time (10 runs): 1.208 ms

-- SELECT 50k rows
SELECT count(1) FROM t1 WHERE a >= 0 AND a <= 200000;
-- Avg Time (10 runs): 225.613 ms
SELECT count(1) FROM r1 WHERE a >= 0 AND a <= 200000;
-- Avg Time (10 runs): 153.655 ms
SELECT count(1) FROM u1 WHERE a >= 0 AND a <= 200000 AND a % 4 = 0;
-- Avg Time (10 runs): 158.905 ms
```



Questions?

Thank You!
mail@joeconway.com

